



Nominal heat input	25,6 kW
Nominal heat output	22,6 kW
Nominal heat output to water	19,1 kW
Nominal heat output to air fot radiation	3,5 kW
Efficiency	88,10 %
Exthaus connection	Up/Back
Pipe diameter	100 mm
Dimension H x W x D	87,5x79x60 cm
Weight	255 Kg







HYDRAULIC KIT



DOMESTIC HOT WATER



3-WAY VALVE CONTROL



BOILER CONTROL



EASY TO CLEAN



WEEKLY PROGRAMMER



DHW PRIORITY



ROOM THERMOSTAT





REMOTE CONTROL



COOKING HOTPLATE


## Overall dimensions / Connections data sheet (Model with upper flue gas outlet)

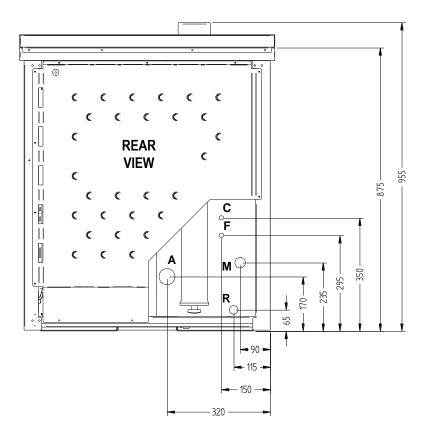



Description of connections	
M = System Delivery	3/4" F
R = System Return	3/4" M
F = Domestic cold water inlet (on prepared models only) + system load and boiler body	14 mm
C = Domestic hot water outlet (on prepared models only)	14 mm
A = Intake pipe	50 mm
S = Flue gas outlet	100 mm M

## Overall dimensions / Connections data sheet (Model with rear flue gas outlet)

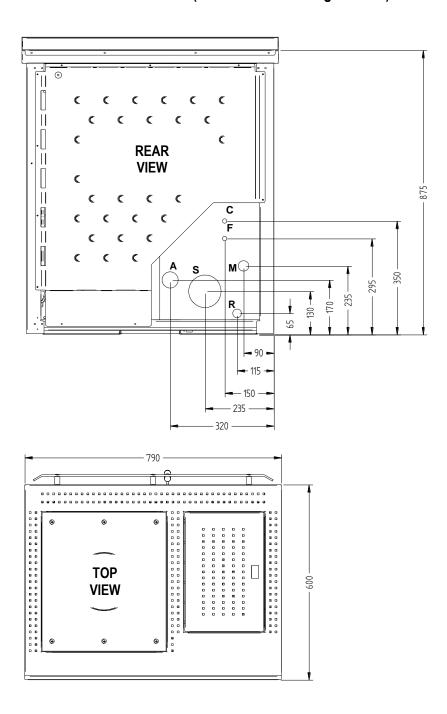

Description of connections	
M = System Delivery	3/4" F
R = System Return	3/4" M
F = Domestic cold water inlet (on prepared models only) + system load and boiler body	14 mm
C = Domestic hot water outlet (on prepared models only)	14 mm
A = Intake pipe	50 mm
S = Flue gas outlet	100 mm M